



423 Cast Iron Globe Valve


CAST IRON GLOBE VALVE, FLANGED ENDS PN16,
METAL/METAL SEAL.
TECHNICAL DATA SHEET

Overview

- Pressure : PN 16 bar.
- Temperature : Max 100°C.
- Certs & Tests;
Hydraulic Test DIN 3230
DIN 3356
NFE 29355



N°	Description	Material
1	Body	Grey Cast Iron
2	Body seat	Stainless steel
3	Disc	Stainless steel
4	Stem	Stainless steel
5	Gasket	Aramide Glass Nitrile
6	Bonnet	Grey Cast Iron
7	Packing gland	PTFE Graphite
8	Stuffing Box	Grey Cast Iron
9	Yoke Sleeve	Grey Cast Iron
10	Handwheel	Grey Cast Iron

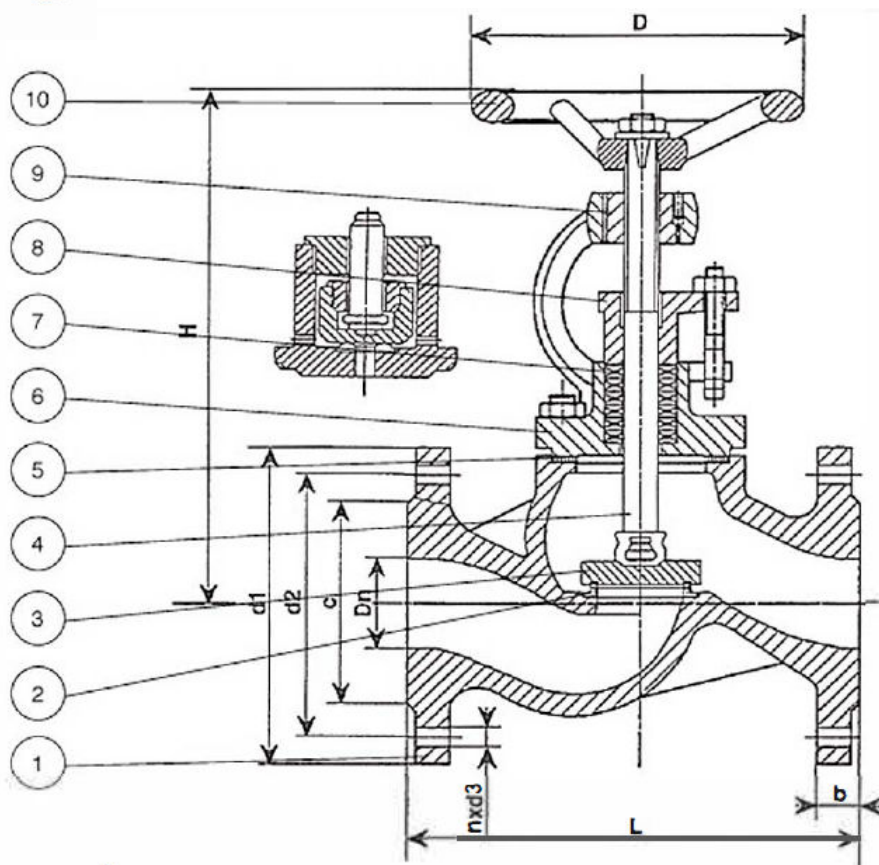

www.orseal.com




01204 474300

Orseal Ltd, Lynstock Way, Lostock, Bolton, Lancashire, BL6 4QR



423 Cast Iron Globe Valve

CAST IRON GLOBE VALVE, FLANGED ENDS PN16,
METAL/METAL SEAL.
TECHNICAL DATA SHEET

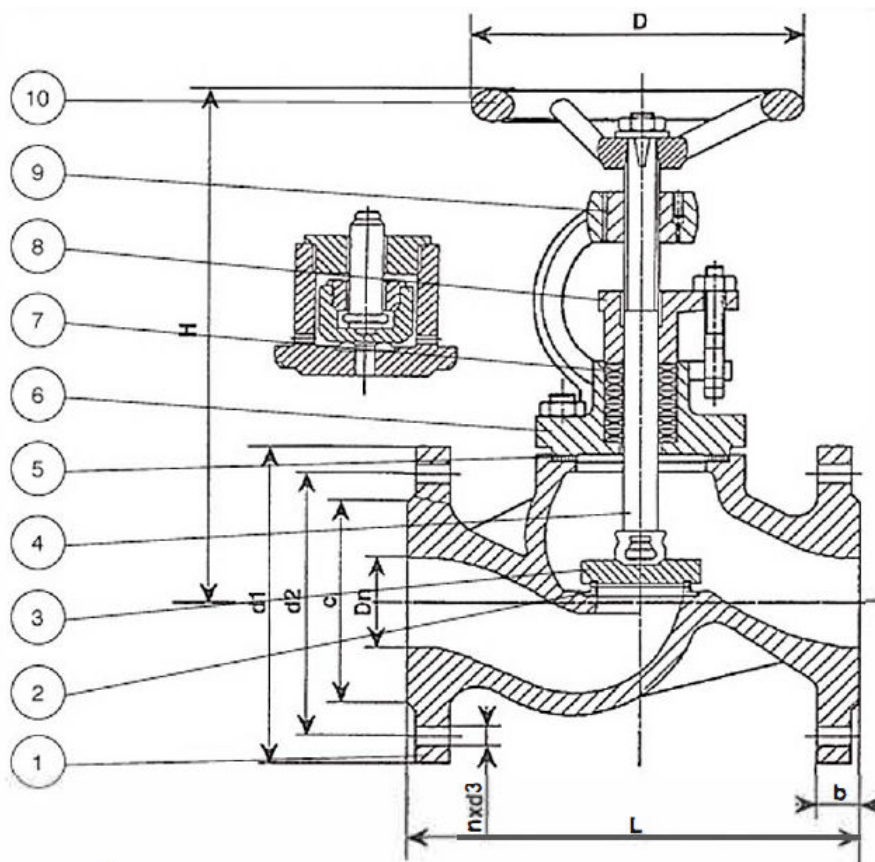

DN	L	d1	d2	nxd3	c	D	b	H	HI	Weight (Kg)
15	130	95	65	4 x 14	45	100	14	173	183	4.50
20	150	105	75	4 x 14	58	100	16	182	192	5.50
25	160	115	85	4 x 14	68	100	16	185	200	6.00
32	180	140	100	4 x 18	78	120	18	207	2227	7.60
40	200	150	110	4 x 18	88	140	18	228	250	12.00
50	230	165	125	4 x 18	102	160	20	255	285	14.00
65	290	185	145	4 x 18	122	160	20	272	312	20.00
80	310	200	160	8 x 18	138	180	22	305	355	26.00
100	350	220	180	8 x 18	158	200	24	360	430	35.00
125	400	250	210	8 x 18	188	250	26	390	445	56.00
150	480	285	240	8 x 22	212	320	26	470	528	76.50
200	600	340	295	12 x 22	268	400	30	500	580	150.00
250	730	405	355	12 x 26	320	400	32	685	770	230.00
300	850	460	410	12 x 26	378	400	32	786	886	340.00



www.orseal.com



01204 474300

Orseal Ltd, Lynstock Way, Lostock, Bolton, Lancashire, BL6 4QR