




426 Cast Iron Swing Check Valve

CAST IRON SWING CHECK VALVE, FLANGED ENDS
PN10/16, METAL/METAL SEAT.
TECHNICAL DATA SHEET

Overview

- Pressure : PN 16 - 10 bar.
- Temperature : Max 150°C.
- Standardized flanges
Dimensions DIN2501/1 PN10 or
PN16.
- Face to Face DIN3202/1
- Certs & Tests;
Hydraulic Test DIN 3230

N°	Description	Material
1	Body	Cast Iron EN-GJL-250
2	Seat	Bronze
3	Disc	Carbon Steel C22
4	Lever	Carbon Steel C22
5	Stem nut	Stainless Steel
6	O Ring	EPDM
7	Cap	PTFE Graphite

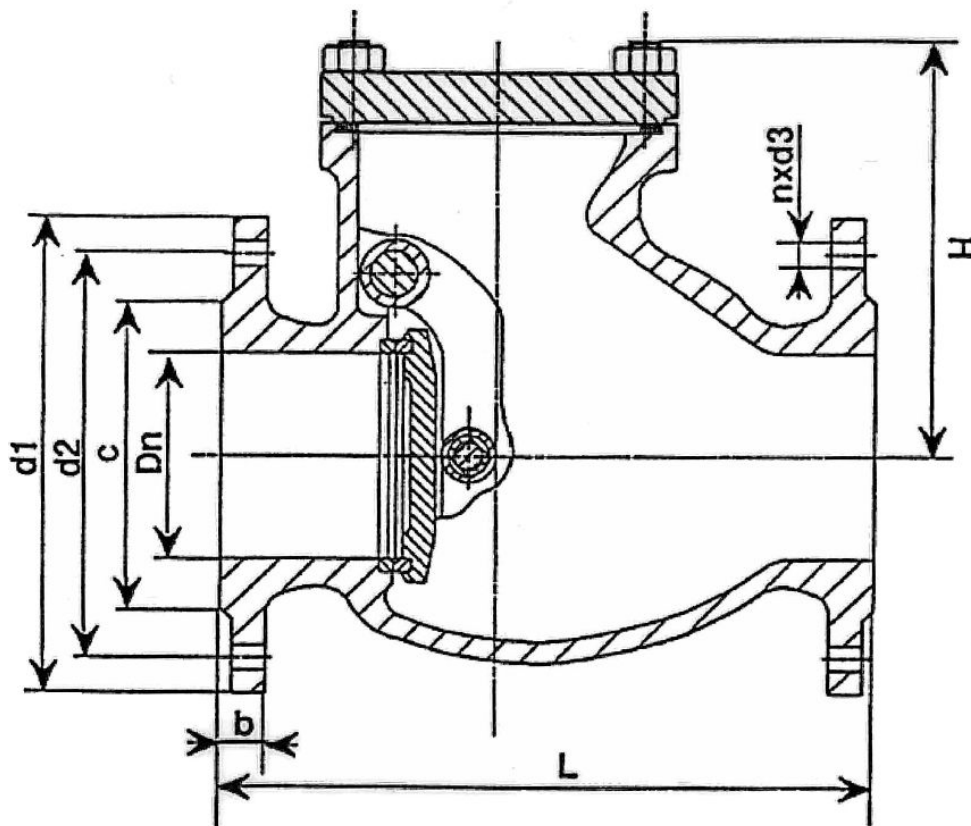

www.orseal.com




01204 474300

Orseal Ltd, Lynstock Way, Lostock, Bolton, Lancashire, BL6 4QR



426 Cast Iron Swing Check Valve

CAST IRON SWING CHECK VALVE, FLANGED ENDS
PN10/16, METAL/METAL SEAT.
TECHNICAL DATA SHEET

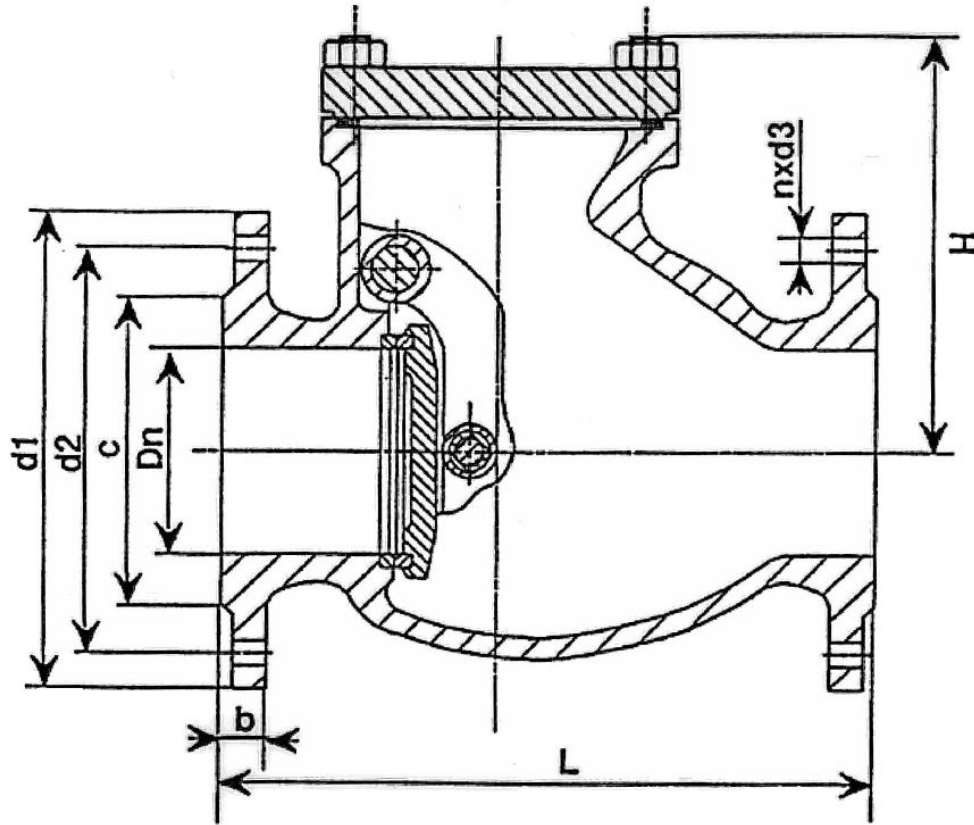

DN	PN	L	d1	d2	nxd3	c	b	H	Weight (Kg)
40	16	180	150	65	4 x 18	88	18	120	12.00
50	16	200	165	75	4 x 18	102	20	135	15.00
65	16	240	185	85	4 x 18	122	20	150	20.00
80	16	260	200	100	8 x 18	138	22	170	28.00
100	16	300	220	110	8 x 18	158	24	188	41.00
125	16	350	250	125	8 x 18	188	24	220	69.00
150	16	400	285	145	8 x 18	212	24	220	72.50
200	16	500	340	160	12 x 22	268	30	255	105.00
250	16	600	405	180	12 x 26	320	32	240	113.00
200	10	500	340	210	8 x 22	268	26	255	105.00
250	10	600	395	240	12 x 22	320	28	310	140.00



www.orseal.com



01204 474300

Orseal Ltd, Lynstock Way, Lostock, Bolton, Lancashire, BL6 4QR