



the valve specialists


423 Cast Iron Globe Valve



Description

- Pressure : PN 16 bar
- Temperature : Max 100°C.
- Certs & Tests;
Hydraulic Test DIN 3230
DIN 3356

No	Description	Material
1	Body	Grey Cast Iron
2	Body Seat	Stainless Steel
3	Disc	Stainless Steel
4	Stem	Stainless Steel
5	Gasket	Aramide Glass Nitrile
6	Bonnet	Grey Cast Iron
7	Packing Gland	PTFE Graphite
8	Stuffing Box	Grey Cast Iron
9	Yoke Sleeve	Grey Cast Iron
10	Handwheel	Grey Cast Iron

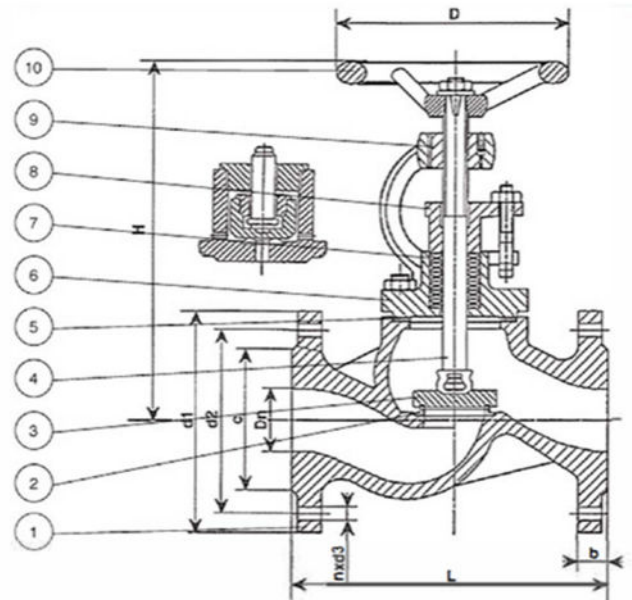

DN	L	d1	d2	nxd3	C	D	b	H	H1	Weight (kg)
15	130	95	65	4 x 14	45	100	14	173	183	4.5
20	150	105	75	4 x 14	58	100	16	182	192	5.5
25	160	115	85	4 x 18	68	100	16	185	200	6
32	180	140	100	4 x 18	78	120	18	207	222	7.6
40	200	150	110	4 x 18	88	140	18	228	250	12
50	230	165	125	4 x 18	102	160	20	255	285	14
65	290	185	145	4 x 18	122	160	20	272	312	20
80	310	200	160	8 x 18	138	180	22	305	355	26
100	350	220	180	8 x 18	158	200	24	360	430	35
125	400	250	210	8 x 18	188	250	26	390	445	56
150	480	285	240	8 x 22	212	320	26	470	528	76.5
200	600	340	295	12 x 22	268	400	30	500	580	150
250	730	405	355	12 x 26	320	400	32	685	770	230
300	850	460	410	12 x 26	378	400	32	786	886	340

Orseal Ltd, Lynstock Way, Lostock, Bolton, BL6 4QR

T: +44 (0)1204474300 / F: +44 (0)1204474347

E: sales@orseal.com

W: www.orseal.com