



the valve specialists


725TS Gas Approved Brass Ball Valve



Description

- Full Bore
- Male to Female
- Steel Lever
- Firesafe
- Body material in nickel-plated, forged brass
- Temp -20°C to $+130^{\circ}\text{C}$

No	Description	Material
1	Body	Forged Nickel Plated
2	End Adapter	Forged Nickel Plated
3	Ball	Machined Chrome-plated
4	Ball Gaskets	PTFE
5	Stem	Machined Chrome plated
6	Thrust Washer	PTFE
7	O-Rings	Elastomer
8	Lever Hand;e	Zinc-plated Steel
9	Self-locking Nut	Zinc plated, 8G Steel

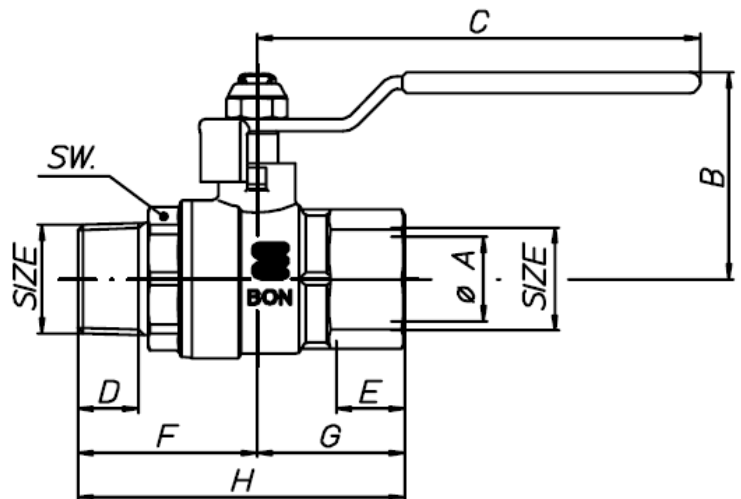

Size	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
$\varnothing A$ pass./bore	8	10	15	20	25	32	40	50
B (mm)	34.5	35.5	41	49.5	53.5	66	72	86
C (mm)	75	75	90	105	105	120	140	170
D (mm)	9.7	10	13.2	14.5	16.8	19.1	19.1	23.4
E (mm)	11	11.4	15	16.3	19.1	21.4	21.4	25.7
F (mm)	30.5	31.4	37.25	42.5	47.5	53.75	59.5	71.5
G (mm)	22.3	22.5	29.75	35	41.5	49.25	54	65
H (mm)	52.8	53.9	67	77.5	89	103	113.5	136.5
SW (mm)	15/17	18/21	25	31	38	47	54	66

Orseal Ltd, Lynstock Way, Lostock, Bolton, BL6 4QR

T: +44 (0)1204474300 / F: +44 (0)1204474347

E: sales@orseal.com

W: www.orseal.com